



## BANTAM™ SQ

Another Lumenrail®  
Component for Life  
Safety and Light

©2021 Korom Photography

## POST SURFACE LUMINAIRE

This post-mount luminaire is designed for wall grazing and pathway illumination with mounting options for railings, walls, decks and entry structures. Superior harsh environment protection and vandal resistance are combined with a simple field or factory prepared installation using included 316 stainless steel hardware.

The Bantam™ SQ's purposful, rectilinear housing design provides an inconspicuous architectural solution for new or retrofit applications and egress compliance opportunities.

- Solid machined 316 stainless steel
- 116 lumens per watt LED (500 mA)
- 70° beam spread @ +10° nadir
- 5 IES file supported optic distributions
- IK10 impact rating
- 24VDC operation
- ETL wet location listed
- IP67 ingress protection
- Standard in 2700 K, 3000 K and 4000 K
- Static color outputs available
- Flat post or surface mounting

# BANTAM™ SQ

Another Lumenrail® Component  
for Life Safety and Light

PROJECT NAME: \_\_\_\_\_


REP AGENCY: \_\_\_\_\_

APPROX. QUANTITY: \_\_\_\_\_



## SCAN QR CODE

for technical information, downloads, instructions,  
and system configuration guides.

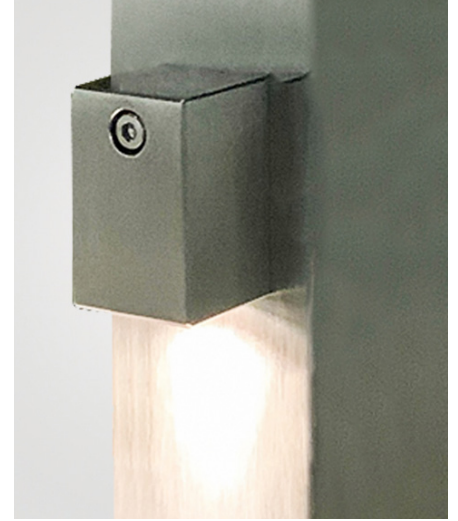


## PART NUMBER BUILDER

<b>LULF30K705XTS</b>	<b>LULF</b>				<b>XTS</b>
<b>EXAMPLE</b>	<b>FIXTURE TYPE</b>	<b>COLOR TEMP</b>	<b>OPTIC</b>	<b>DRIVE CURRENT</b>	<b>BANTAM</b>
<i>* Indicates stock, other options may require additional leadtime</i>	LULF- Lumenpod®	*27K- 2700°K *30K- 3000°K *40K- 4000°K 50K- 5000°K	BLU- Blue GRN- Green RED- Red AMB- Amber	16- 16° beam 23- 23° beam 46- 46° beam *70- 70° beam 94- 94° beam	*5- 500 mA *3- 350 mA  Extended life 100,000HR version requires 250 mA
					XTS- Machined 316 SS, flat surface-mount housing

## ELECTRICAL SPECIFICATIONS


<p>Intertek</p> <p>All electrical connections to be made by a qualified electrician in accordance with all national, state and local electrical codes.</p>	<b>24VDC</b>	<b>ETL LISTED WET, IK10, IP67, CE</b>	<b>0-10V INPUT</b>	<b>-40°F TO +120°F</b>
	<b>INPUT VOLTAGE</b>	<b>CERTIFICATIONS</b>	<b>DIMMING</b>	<b>OPERATING TEMP</b>
	<b>CLASS 2 REQUIRED</b>	<b>5 YEARS</b>	<b>UP TO 116 LM/W LED</b>	<b>80+</b>
	<b>DRIVER</b>	<b>WARRANTY</b>	<b>EFFICIENCY</b>	<b>CRI</b>

## CONSTRUCTION

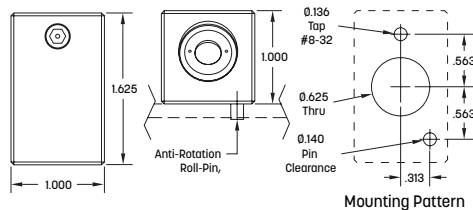

Bantam SQ is solid machined 316 stainless steel with security hardware and is designed for flat surface mounting.

## PHOTOMETRICS



Bantam SQ is designed with an inherent 10° bias above nadir. This asymmetric feature projects the output from the mounting surface towards the path or feature. Scan QR code or visit our website to view or download available IES reports.

## LUMENGEAR™ LED DRIVER & NEMA ENCLOSURE OPTIONS

Wagner offers multiple ETL listed options for both 24VDC power supplies and NEMA enclosures. Quantities and types will be configured based on your specifications and design. Additional specification options are available by request. Not all options apply to all products—please verify compatibility with the factory.

Specifications subject to change without notice. Verify data at time of order.

### CLASS II DRIVERS:

- STD 100W
- Dali, DMX, 0-10V Dimming Protocols
- Multiple Wattages
- Made in USA Units Available

### NEMA ENCLOSURES:

- 4X - Polycarbonate
- 4X - Painted Steel
- 4X - Stainless Steel

@wagnercompanies



888-243-6914 // rfq@mailwagner.com  
10600 West Brown Deer Road // Milwaukee, WI 53224, USA

© 2021 R&B Wagner, Inc. All Rights Reserved.  
WagnerArchitectural.com  
LUBS SUBM R1