



LUMENPOD[®] 30


Another Lumenrail[®]
Component for Life
Safety and Light

©2020 John Korom

INTEGRATED POST LUMINAIRE

This architectural systems product leverages the vertical elements of a post-mounted railing. The fixtures output has a main beam angle at 35° above nadir. The luminaire's asymmetric throw provides a spectacular crescent of illumination across paths, ramps and stairs.

Its machined stainless steel body fits perfectly flush in 1.90" pipe with a simple push-in installation and dedicated removal tool for vandal resistance. Lumenpod[®] 30 provides a no-profile architectural solution for new or retrofit applications and egress compliance opportunities.

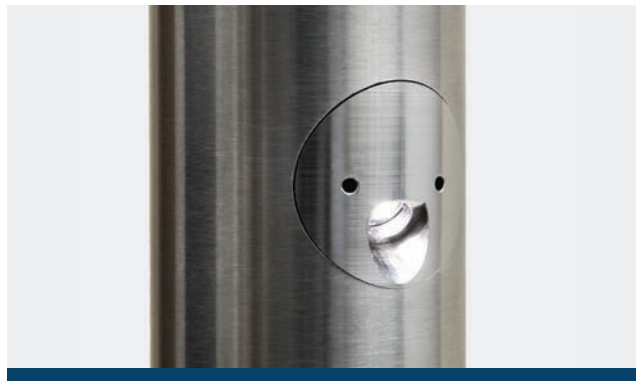

Specifications subject to change without notice. Verify data at time of order.

- Solid machined 316 stainless steel
- 116 lumens per watt LED (500 mA)
- 70° beam spread @ +35° nadir
- IES file supported optical distribution
- IK10 impact rating and secure installation
- 24VDC operation
- ETL wet location listed
- IP67 ingress protection
- Standard in 2700 K, 3000 K and 4000 K
- 1.90" schedule 40, post mounting only

LUMENPOD® 30

Another Lumenrail® Component
for Life Safety and Light

PROJECT NAME: _____

REP AGENCY: _____

APPROX. LINEAR FT: _____

SERVICE OPTIONS: Field Measure Job Site Support System Installation



SCAN QR CODE
for technical information,
downloads and instructions.


PART NUMBER BUILDER

| | | | | |
|---|--|--|---------------|--|
| LULV40K703 | LULV | | 70 | |
| EXAMPLE | FIXTURE TYPE | COLOR TEMP | OPTIC | DRIVE CURRENT |
| <i>Stock items are listed. Other variations are available but may require additional lead time.</i> | LULV - Lumenpod® 30 1.90" schedule 40 post only | 27K - 2700 K 30K - 3000 K 40K - 4000 K | 70 - 70° beam | 5 - 2.2W @ 500 mA 3 - 1.7W @ 350 mA <i>Extended life 100,000HR version requires 350 mA</i> |

ELECTRICAL SPECIFICATIONS

| | | | | |
|--|-------------------------|---------------------------------------|---------------------------|------------------------|
| <p>Intertek</p> <p>All electrical connections to be made by a qualified electrician in accordance with all national, state and local electrical codes.</p> | 24VDC | ETL LISTED WET, IK10, IP67, CE | 0-10V INPUT | -40°F TO +120°F |
| | INPUT VOLTAGE | CERTIFICATIONS | DIMMING | OPERATING TEMP |
| | CLASS 2 REQUIRED | 5 YEARS | UP TO 116 LM/W LED | 80+ |
| | DRIVER | WARRANTY | EFFICIENCY | 8" |
| | | | | CRI |
| | | | | WIRE LENGTH |


CONSTRUCTION



The Lumenpod® 30's machined stainless steel body dissipates heat and protects the LED from tampering or impacts. Spring steel wings position it flush with 1.90" posts and an adjustable plate secures the mount.

PHOTOMETRICS

70° @ 35° above nadir



Asymmetric performance is achieved through a 35° projection angle, centered at 27° above grade in a 1.90" handrail post. Scan QR code or visit our website to view or download available IES reports.

LUMENGEAR™ LED DRIVER & NEMA ENCLOSURE OPTIONS

Wagner offers multiple ETL listed options for both 24VDC power supplies and NEMA enclosures. Quantities and types will be configured based on your specifications and design. Additional specification options are available by request. Not all options apply to all products, please verify compatibility with the factory.

CLASS II DRIVERS:

- STD 100W
- Dali, DMX, 0-10V Dimming Protocols
- Multiple Wattages
- Made in USA Units Available

NEMA ENCLOSURES:

- 4X - Polycarbonate
- 4X - Painted Steel
- 4X - Stainless Steel

Specifications subject to change without notice. Verify data at time of order.

@wagnercompanies



888-243-6914 // rfq@mailwagner.com
10600 West Brown Deer Road // Milwaukee, WI 53224, USA

© 2021 R&B Wagner, Inc. All Rights Reserved.
WagnerCompanies.com
LULV SUBM R3